


BRx63-40 PMDC motor

Ø63 mm frame // 40 mm stack

PARVALUX

Lead Length - 300mm [11.81"]
 Type - UL3289 / CSA CL 1503 600V 150°C
 Colour - Red & Black
 16 AWG

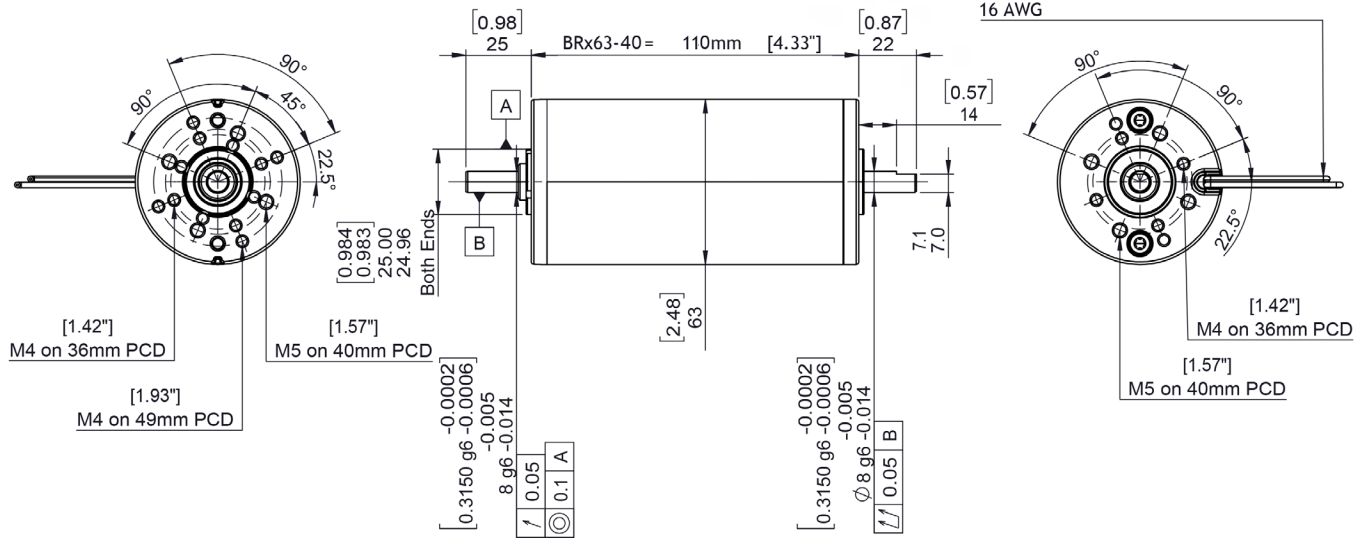

Part number key	
Modular	#####
Standard	#####
Special	#####

Available on request: Custom shaft length and diameter, shaft on both sides, special windings for specific voltages and speed, higher IP protection class, custom flanges and connectors

All products are built in accordance to performance tolerances from EN60034-1:2010. As continuous improvement, Parvalux periodically test their product range to ensure test results are as accurate as possible and are therefore subject to change. Please ensure you are using the latest datasheets found on our website

Technical data				
1 Part number		6340312	6340324	6340348
2 Nominal power	W	57	57	57
3 Nominal voltage	V	12	24	48
4 No load speed	rpm	3581	3543	3543
5 No load current	A	0.64	0.32	0.16
6 Nominal speed	rpm	3000	3000	3000
7 Nominal continuous torque (S1)	Nm	0.18	0.18	0.18
8 Nominal continuous current (S1)	A	6.4	3.2	1.6
9 Max. intermittent torque (S3)	Nm	0.30	0.30	0.30
10 Stall current	A	64	31	16
11 Stall torque	Nm	1.9	1.9	1.9
12 Stack length	mm	40	40	40
13 Maximum efficiency	%	79	79	79
14 Terminal resistance - phase to phase	Ω	0.190	0.770	3.000
15 Terminal inductance - phase to phase	mH	-	-	-
16 Speed constant	rpm/V	301	149	75
17 Torque constant	Nm/A	0.03	0.06	0.13
18 Speed torque gradient	rpm/Nm	1892	1892	1892
19 Rotor inertia	gcm ²	740	740	740

Thermal data		Modular system	
20 Ambient temperature	°C	40	

Mechanical data	
21 Radial load [distance from flange]	N [mm]
	150 [15]

Other data	
22 Number of poles	2
23 Weight	Kg 1.2
24 IP rating	IP54
25 Enclosure	Enclosed
26 Insulation Class	F
27 Reversible	Yes

Modular system	
Brake	+L mm
1.5 Nm	28.2
Gearbox	+L mm
GB28	85
PG60	44 - 90
PG72	44 - 99
Encoder	+L mm
Optical	9
Controller	
SC 50/15	
ESCON	
EPOS	

+L mm = added length