
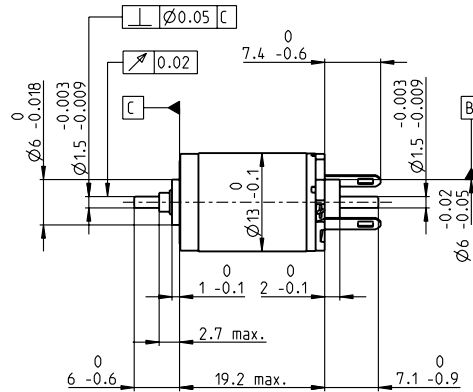


RE 13 Ø13 mm, Precious Metal Brushes, 0.75 Watt



M 1:1

- Stock program
 Standard program
 Special program (on request)

Part Numbers

Motor Data


		118431	118432	118433	118434	118435	118436	118437	118438	118439	118440	118441	118442	118443	118444	118445
Values at nominal voltage																
1 Nominal voltage	V	0.6	0.72	0.9	1.2	1.5	1.8	1.8	2.4	3	3.6	4.8	6	6	7.2	10
2 No load speed	rpm	6900	6710	6590	7250	6990	6850	5950	6490	6700	6480	6950	7000	6530	6650	7030
3 No load current	mA	88.2	71.7	56.1	47.3	36.2	29.4	24.7	20.6	17.1	13.7	11.2	9.06	8.33	7.09	5.46
4 Nominal speed	rpm	5170	3920	3070	2740	1430	1430	682	1350	1300	1090	1520	1510	990	1140	1480
5 Nominal torque (max. continuous torque)	mNm	0.511	0.643	0.837	1.03	1.26	1.3	1.34	1.28	1.3	1.29	1.28	1.26	1.26	1.27	1.26
6 Nominal current (max. continuous current)	A	0.72	0.72	0.72	0.72	0.671	0.562	0.504	0.396	0.331	0.268	0.213	0.17	0.158	0.134	0.101
7 Stall torque	mNm	1.71	1.44	1.51	1.63	1.59	1.66	1.54	1.66	1.66	1.61	1.7	1.68	1.54	1.59	1.65
8 Stall current	A	2.14	1.47	1.21	1.08	0.812	0.69	0.557	0.489	0.404	0.318	0.269	0.214	0.184	0.161	0.127
9 Max. efficiency	%	64	61	62	63	63	63	63	64	64	63	64	64	62	63	63
Characteristics																
10 Terminal resistance	Ω	0.281	0.491	0.742	1.11	1.85	2.61	3.23	4.9	7.42	11.3	17.8	28	32.6	44.9	78.8
11 Terminal inductance	mH	0.006	0.009	0.015	0.022	0.036	0.054	0.072	0.108	0.158	0.243	0.377	0.579	0.661	0.921	1.59
12 Torque constant	mNm/A	0.802	0.98	1.25	1.51	1.96	2.41	2.76	3.39	4.1	5.08	6.32	7.84	8.37	9.89	13
13 Speed constant	rpm/V	11900	9740	7660	6310	4870	3970	3460	2820	2330	1880	1510	1220	1140	966	734
14 Speed / torque gradient	rpm/mNm	4170	4880	4560	4640	4600	4310	4040	4090	4220	4190	4250	4350	4440	4380	4450
15 Mechanical time constant	ms	15.6	14.9	14.3	14.1	13.9	13.7	13.5	13.5	13.5	13.5	13.6	13.7	13.6	13.6	13.7
16 Rotor inertia	gcm ²	0.358	0.291	0.299	0.29	0.288	0.303	0.318	0.315	0.306	0.308	0.304	0.3	0.293	0.297	0.294

Specifications

Thermal data		
17 Thermal resistance housing-ambient	46 K/W	
18 Thermal resistance winding-housing	14 K/W	
19 Thermal time constant winding	5.18 s	
20 Thermal time constant motor	76.1 s	
21 Ambient temperature	-20...+65°C	
22 Max. winding temperature	+85°C	
Mechanical data (sleeve bearings)		
23 Max. speed	11 000 rpm	
24 Axial play	0.05 - 0.15 mm	
25 Radial play	0.014 mm	
26 Max. axial load (dynamic)	0.8 N	
27 Max. force for press fits (static)	15 N	
(static, shaft supported)	170 N	
28 Max. radial load, 5 mm from flange	1.4 N	
Other specifications		
29 Number of pole pairs	1	
30 Number of commutator segments	7	
31 Weight of motor	12 g	

Values listed in the table are nominal.
Explanation of the figures on page 151.

Operating Range

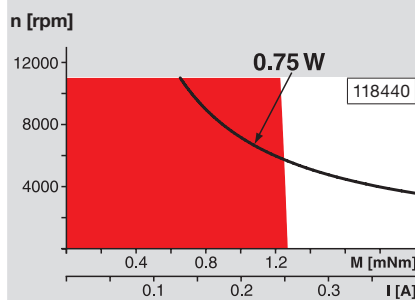

Comments

- **Continuous operation**
 In observation of above listed thermal resistance (lines 17 and 18) the maximum permissible winding temperature will be reached during continuous operation at 25°C ambient.
 = Thermal limit.
- Short term operation**
 The motor may be briefly overloaded (recurring).
- **Assigned power rating**

maxon Modular System

Overview on page 20–27

Recommended Electronics:

Notes
 ESCON Module 24/2
 ESCON 36/2 DC
 EPOS2 24/2
 EPOS2 Module 36/2
 MAXPOS 50/5

Page 24

416

416

424

424

435

Encoder MR

16 CPT,
2 channels
Page 385

Encoder MR

64 - 256 CPT,
2 channels
Page 386/387

Encoder MEnc

Ø13 mm
16 CPT, 2 channels
Page 409